

text for tenders

aluminium roller fitting for sliding doors
astec b.1000

roller fitting made of aluminium for floor guided sliding doors with door leaves made of glass (thickness 10/12mm). narrow, shallow roller guide tracks integrated in the floor bear weights of up to 300 kg per metre.

the visible roller guide track is 25mm wide and 6mm deep. precision rollers with needle bearings regularly positioned along a guide rail ensure smooth sliding. the glass panel is protected and cushioned by a u-profile edge guard that is firmly fixed to the glass.

door load is transferred entirely into floor. u-profile ceiling guide prevents the door leaf from lifting out.

all visible surfaces are anodized EV1.

manufacturer: astec gmbh, design fittings (www.astec-design.de)

system includes:

1 pcs floor installation set complete, anodized EV1
including floortrack, roller guide track and coverprofile

1 pce u-profile edge guard, anodized EV1

1pce u-profile ceiling guide made of aluminium


length customised according to individual door width.

2 pcs door stoppers for fix positioning mounted into the ceiling guide.

with all fixing parts, felt, complete documentation.

from the astec accessories range are also available:

astec handles
astec knobs
astec flush pulls

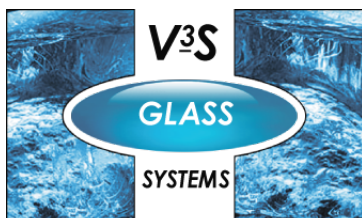

www.v3s-glass-systems.be

V3S Glass Systems BVBA
Bossestraat 4
9420 Erpe
Tel.: 053 80 87 77
Fax: 053 80 82 64
E-mail: info@v3s-glass-systems.be